


Steel Door & Frame


Design • Manufacture • Supply



F




N



V



L



NL



VL



6P



2P



Steel Door & Frame

Design • Manufacture • Supply



Flush Door



Flush Door



1 Panel



2 Panel



6 Panel



Louver+Vision



Emergency Exit



Half Glazing



Narrow Vision



Narrow Vision

Steel Door & Frame

Design • Manufacture • Supply



1 Panel



2 Panel



6 Panel




Emergency Exit



Double Door





Double Door

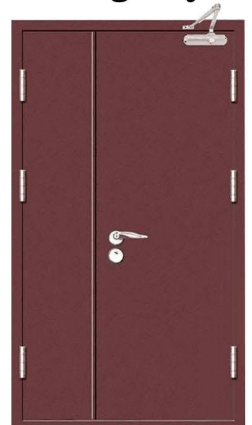


Unequal Door

Temperature Rise Steel Fire Door & Frame

Design • Manufacture • Supply

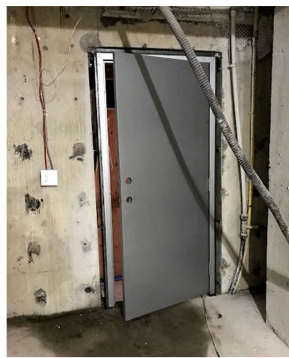


Test Institution	INTERTEK
Temperature Rise Rating	Met the requirements for a 60-minute exposure period with hose stream
Test Standard	NFPA 252(2021)Ed.2022 CAN/ULC S104:2015(R2020) UL 10(c) (2016)Ed.3(R:27 May 2021) UL 10(b) (R2020)
Specification	1214mm(wide)x 2416.2mm(high)x 44.5mm thick

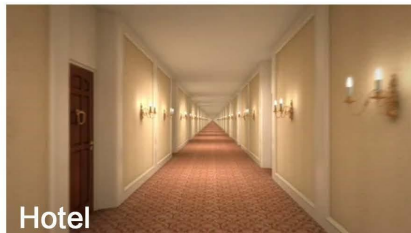

Wooden Door & Frame

Design • Manufacture • Supply



F

N

V

L

NL

VL

1P

2P

3P



Wooden Door & Frame

Design • Manufacture • Supply



Push Door



Panel Door



Push Door



Office Door



Hotel Door



Push Door



Apartment Door



Push Door




Entrance Door



Emergency Exit

Interior Wooden Door & Frame


Design • Manufacture • Supply

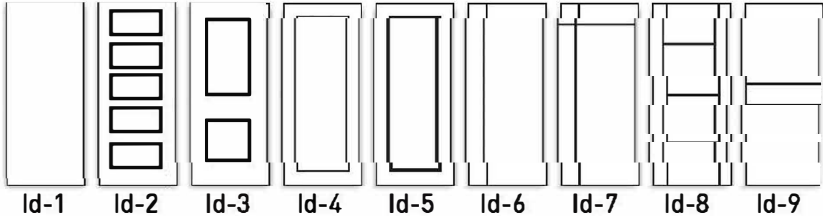

Finish paint is available and can be customized

STC Wooden Door & Frame

Design • Manufacture • Supply



Test Institution	INTERTEK
STC Rating	Sound Proof Ratings Up To Stc 38.
Test Standard	ASTM E90-09 (R2016)
Specification Standard	ASTM E413-16
Specification	Door Frame: 2452x1289x150mm Door Leaf Size: 2400x1200x60mm



Hotel



Bedroom



Cinema

Door Accessories

Design • Manufacture • Supply



Cylindrical Lock



Mortise Lock



Panic Bar



Outside Trim



Dead Lock



Card Reader Lock



Ball Bearing
Hinge



Self-closing
Hinge



Mounted
Closer



Concealed
Closer



Louver



Wire Glass



Auto Bottom
Seal



Threshold



Viewer



Push&Pull
Plate



Gasket



Flush Bolt